



09/18/00

## BIRCH, STEWART, KOLASCH &amp; BIRCH, LLP

INTELLECTUAL PROPERTY LAW  
8110 GATEHOUSE ROAD  
SUITE 500 EAST  
FALLS CHURCH, VA 22042-1210  
U S A  
(703) 205-8000

FAX: (703) 205-8050  
(703) 998-8590 (G IV)

e-mail: mailroom@bskb.com  
web: http://www.bskb.com

CALIFORNIA OFFICE:  
COSTA MESA, CALIFORNIA

TERRILL C. BIRCH  
RAYMOND C. STEWART  
JOSEPH A. KOLASCH  
JAMES M. SLATTERY  
BERNARD L. SWEENEY\*\*  
MICHAEL K. MUTTER  
CHARLES CORENSTEIN  
GERALD M. MURPHY, JR  
LEONARD R. SVENSSON  
TERRY L. CLARK  
ANDREW D. MEIKLE  
MARC S. WIENER  
JOE MCKINNEY MUNCY  
ROBERT J. KENNEY  
DONALD J. DALEY  
JOHN W. BAILEY  
JOHN A. CASTELLANO, III  
GARY D. YACURA

OF COUNSEL:  
HERBERT M. BIRCH (1905-1996)  
ELLIOT A. GOLDBERG\*  
WILLIAM L. GATES\*  
EDWARD H. VALANCE  
RUPERT J. BRADY (RET.)\*  
F. PRINCE BUTLER  
FRED S. WHISENHUNT

\*ADMITTED TO A BAR OTHER THAN VA.

THOMAS S. AUCHTERLONIE  
JAMES T. ELLER, JR.  
SCOTT L. LOWE  
MARK J. NUEL, Ph.D.  
D. RICHARD ANDERSON  
PAUL C. LEWIS  
MARK W. MILSTEAD\*  
RICHARD J. GALLAGHER  
JAYNE M. SAYDAH

REG. PATENT AGENTS:  
FREDERICK R. HANDREN  
MARYANNE ARMSTRONG, Ph.D.  
MARI HATSUMI  
MIKE S. RYU  
CRAIG A. MCGROBBIE  
GARTH M. DAHLEN, Ph.D.  
LAURA C. LUTZ  
ROBERT E. GOOZNER, Ph.D.  
HYUNG M. SOHN  
MATTHEW J. LATTIG  
ALAN PEDERSEN-GILES  
C. KEITH MONTGOMERY  
TIMOTHY R. WYCKOFF  
KRISTL L. RUPERT, Ph.D.  
LARRY J. HUME  
ALBERT LEE  
HEAVY A. SAYADIAN, Ph.D.

JCS25 U.S. PTO  
09/664360



09/18/00

Date: September 18, 2000Docket No.: 3449-0132P

Assistant Commissioner for Patents  
Box PATENT APPLICATION  
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of

Inventor(s): ROH, Jin-Tae

For: OPTIMAL RECORDING METHOD FOR OPTICAL RECORDING MEDIA AND  
OPTICAL RECORDING MEDIUM STORED WITH INFORMATION ABOUT  
OPTIMUM RECORDING CONDITIONS

Enclosed are:

X A specification consisting of 36 pagesX 8 sheet(s) of Formal drawingsX An assignment of the invention     Certified copy of Priority Document(s)X Executed Declaration X Original      Photocopy     A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27     Preliminary Amendment     Information Disclosure Statement, PTO-1449 and reference(s)

Other

The filing fee has been calculated as shown below:

LARGE ENTITY				SMALL ENTITY		
FOR	NO. FILED	NO. EXTRA	RATE FEE		RATE FEE	
BASIC FEE	***** ***** *****	***** ***** *****	***** ***** *****	\$690.00	or ***** ***** *****	\$345.00
TOTAL CLAIMS	21 - 20 =	1	x18 =\$	18.00	or x 9 = \$	0.00
INDEPENDENT	5 - 3 =	2	x78 =\$	156.00	or x 39 = \$	0.00
MULTIPLE DEPENDENT CLAIM PRESENTED	no		+260 = \$	0.00	or +130 = \$	0.00
TOTAL \$				864.00	TOTAL \$ 0.00	

A check in the amount of \$ 904.00 to cover the filing fee and recording fee (if applicable) is enclosed.

Please charge Deposit Account No. 02-2448 in the amount of \$\_\_\_\_\_. A triplicate copy of this transmittal form is enclosed.

No fee is enclosed.

If necessary, the Commissioner is hereby authorized in this, concurrent, and future replies, to charge payment or credit any overpayment to Deposit Account No. 02-2448 for any additional fees required under 37 C.F.R. 1.16 or under 37 C.F.R. 1.17; particularly, extension of time fees.

Respectfully submitted,

BIRCH, STEWART, KOLASCH & BIRCH, LLP

By JOSEPH A. KOLASCH  
Reg. No. 22,463  
P. O. Box 747  
Falls Church, Virginia 22040-0747

OPTIMAL RECORDING METHOD FOR OPTICAL RECORDING MEDIA AND  
OPTICAL RECORDING MEDIUM STORED WITH INFORMATION ABOUT OPTIMUM  
RECORDING CONDITIONS

5 BACKGROUND OF THE INVENTION

Field of the Invention

10 The present invention relates to an optimal recording method for optical recording media, and more particularly to an optimal recording method for optical recording media which is capable of recording information about optimum recording conditions on an optical recording medium in order to allow a subsequent recording of data on the optical recording medium at an optimum recording power, based on the recorded optimum recording condition information. The present invention also  
15 relates to an optical recording medium recorded with such optimum recording condition information.

Description of the Conventional Art

20 Fig. 1 illustrates the configuration of an optical recording/reproducing apparatus for recording data on an optical recording medium and reproducing the recorded data.

As shown in Fig. 1, this optical recording/reproducing apparatus includes a digital recording signal processing unit  
25 30a for adding an error correction code (ECC) to input digital

data, thereby converting the input digital data into a recording format, a channel bit encoder unit 40 for re-converting the data, converted into the recording format, into a bit stream, an optical driver unit 50 for outputting a light amount drive signal, an optical pick-up unit 11 for recording a desired signal onto an optical recording medium 10 in accordance with the light amount drive signal, and detecting a recording signal from the optical recording medium 10, and a drive unit 80 for driving the optical pick-up unit 11 and a motor M. The optical recording/reproducing apparatus further includes an R/F unit 60 for filtering a signal detected by the optical pick-up unit 11, conducting a waveform shaping for the filtered signal, and converting the resultant signal into a binary signal, a serve unit 70 for controlling the driving of the drive unit 80, based on signals indicative of tracking errors and focusing errors generated in the optical pick-up unit 11, along with the rotating speed of the optical recording medium 10, a digital reproduced signal processing unit 30b for recovering the binary signal into original data at a clock synchronizing with the binary signal, and a microcomputer 100 for controlling the recording/reproducing procedure.

Now, an operation of the above mentioned optical recording/reproducing apparatus will be described in conjunction with Fig. 1.

When a data recording request is inputted to the

microcomputer 100 under the condition in which an optical recording medium 10 is loaded in a tray not shown, the optical recording/reproducing apparatus conducts an optimal power calibration (OPC).

5 In accordance with the OPC procedure, the microcomputer 100 controls the servo unit 70 and the drive unit 80 prior to recording of input data. In accordance with controlled operations of the servo unit 70 and drive unit 80, the optical pick-up unit 11 is controlled to read out a target writing power value  $P_{ind}$  recorded in the form of 3-bit data W1, W2, and W3. Fig. 2 illustrates an example of the target writing power value recorded in the form of 3-bit data on the optical recording medium 10.

15 The microcomputer 100 then applies an adjustment signal to the optical driver unit 50 in a variable fashion. The adjustment signal is adapted to vary an optical power with reference to the read target recording power value, for example, 8 mW. Fig. 3 illustrates a variation in optical power with reference to a target recording power value. The optical driver unit 50 outputs a recording signal for test data at an optical drive power corresponding to the adjustment signal. In accordance with the recording signal, the optical pick-up unit 11 records test data onto a test recording area of the optical recording medium 10. Fig. 4 illustrates a recording signal test area A in a re-writable optical recording medium (CD-RW), along

20

25

with a count area B for recording the number of test times.

The microcomputer 100 controls the pick-up unit 11 in a state, in which test data is recorded on the test area A of the optical recording medium 10, as shown in Fig. 4, in order to sequentially read out test data recorded several times. Each of the test data sequentially read is applied to the R/F unit 60 which, in turn, conducts a filtering and a waveform shaping for the test data, thereby reproducing that test data. Fig. 5 illustrates a reproduced signal for the test data recorded on the optical recording medium.

The microcomputer 100 then calculates the degree of modulation, based on the reproduced signal, and estimates a polynomial expression for a modulation degree curve ( $m = f(p)$ ), using a curve filtering.

The modulation degree  $m$  corresponds to a value of  $I_{11T}/I_{TOP}$  ( $m = I_{11T}/I_{TOP}$ ). Here, " $I_{11T}$ " represents the amplitude of the reproduced signal for an 11T signal, and " $I_{TOP}$ " represents a peak value of the 11T signal.

Next, a  $\gamma$  curve is derived using the estimated modulation degree curve " $m = f(p)$ ".

Fig. 6 illustrates a modulation degree curve " $m = f(p)$ " and a  $\gamma$  curve " $\gamma = g(p)$ " for detecting an optimum recording power value. Here, an expression " $\gamma = p/m \times f'(p)$ " is established.

Also, the value of a target  $\gamma$  recorded on the optical

recording medium 10 is read out. Based on the read target  $\gamma$  value, an optimum optical power is derived. Fig. 7 illustrates respective data formats of  $\gamma$  and  $\rho$  values recorded on the optical recording medium 10.

5           The microcomputer 100 controls the optical driver unit 50 to output, for the input data, a recording signal according to the optimum optical drive power detected in the above mentioned procedure. The optical drive unit 50 applies, to the optical pick-up unit 11, the recording signal according to the optical drive power, thereby allowing a pulse-width-modulated signal to be recorded onto a program area of the optical recording medium 10.

10           In accordance with a conventional data recording method applied to the above mentioned optical recording/reproducing apparatus, however, the detection of the optimum optical drive power should be conducted using the result of the recording of test data when every data is to be recorded on the optical recording medium. That is, the detection of the optimum optical drive power should be repeatedly conducted for all data to be recorded. For this reason, there is a problem in that the data recording time is delayed.

15           In order to solve this problem, the following technique has been proposed.

20           That is, the microcomputer 100, which is a microcomputer internally equipped with a memory, is configured to detect an

optimum recording power value based on the recording and reproduction characteristics of test data, as mentioned above, and to record the detected optimum recording power value onto a designated particular area of an optical recording medium 10, along with an intrinsic recorder identification code for the optical recording/reproducing apparatus previously stored in the memory, that is, information for identifying the optical recording/reproducing apparatus, in order to reserve those information.

When an optical recording medium 10 is subsequently inserted into the recording/reproducing apparatus for recording of data, the microcomputer 100 reads out an optimum recording power value and an intrinsic recorder identification code from a particular area of an optical recording medium 10.

The microcomputer 100 then compares the read intrinsic recorder identification code with the intrinsic recorder identification code of the optical recording/reproducing apparatus. When the microcomputer 100 determines that the read intrinsic recorder ID code corresponds to the intrinsic recorder ID code of the optical recording/reproducing apparatus, it conducts recording of data using an optimum power identified from the optical recording medium 10 without conducting the procedure for detecting an optimum recording power.

However, where there is no optimum recording power value



stored in the optical recording medium 10 or where the intrinsic recorder ID code read out from the optical recording medium 10 does not correspond to the intrinsic code of the recording/reproducing apparatus, the microcomputer 100 conducts the procedure for detecting an optimum recording power, that is, an OPC procedure, because the optimum power value stored in the optical recording medium 10 is that detected and recorded by a recording apparatus other than the above mentioned recording/reproducing apparatus. An optimum recording power value detected in the OPC procedure is then recorded onto the optical recording medium 10, along with the intrinsic recorder ID code of the recording/reproducing apparatus. Thereafter, desired data is recorded onto the optical recording medium 10 using the optimum power detected in the OPC procedure.

Thus, it is possible to more or less reduce the data recording time.

Meanwhile, where recording of data is repeated on a rewritable recording medium in an overwrite fashion, there may be a degradation at side portions of recording marks subjected to an image variation. As a result, a degradation in data recording characteristics may occur. In particular, when the recording apparatus overwrites data at a recording power lower than that used upon the previous data recording, the degradation in data recording characteristics becomes more severe, thereby resulting in increased errors in reproduced

signals. Fig. 8 illustrates a relation of the amount of jitters involved in recorded data with respect to the number of data overwrite times. Also, Fig. 9 illustrates a degradation in reproduction characteristics varying depending on a variation in recording power between successive recording procedures.

The above mentioned problem is also involved in the method using the optimum power value along with the recorder ID code. That is, although recording of data is carried out using the power value derived in accordance with an OPC procedure when the recorder ID code detected from the optical recording medium is different from the identification code of the recording apparatus, it is difficult to expect satisfactory reproduction characteristics when the derived power value is not more than the power value used for the previous data recording, as shown in Fig. 9. The same problem may also occur where recording of data is carried out using the same power as the optimum power value for the data, previously recorded, without the execution of the OPC procedure when the recorder ID code detected from the optical recording medium corresponds to the identification code of the recording apparatus.

Due to such a degradation in reproduction characteristics, reproduction errors may frequently occur, thereby making it impossible to recover the recorded data.

Therefore, an object of the invention is to provide an optimal recording method for optical recording media which is capable of recording information about optimum recording conditions on an optical recording medium in order to allow a subsequent recording of data on the optical recording medium at an optimum recording power, based on the recorded optimum recording condition information.

Another object of the invention is to provide an optical recording medium recorded with information about optimum recording conditions.

In accordance with the present invention, information about optimum recording conditions is recorded on a particular area of an optical recording medium.

When data is overwritten onto the optical recording medium, the recorded optimum recording condition information is identified. Otherwise, the recording power used for data recorded on the optical recording medium is detected, based on the characteristics of the recorded data. In accordance with the present invention, the recording power used for data to be overwritten is not less than the recording power used in the previous data recording, based on the optimum recording condition information or the recording power derived on the basis of the characteristics of the recorded data.

Thus, the present invention avoids a degradation in the

reproduction characteristics of overwritten data occurring when the recording power value used in the data overwriting is less than the recording power value used in the previous data recording.

5 In accordance with one aspect, the present invention provides an optimal recording method for optical recording media comprising: a recording condition detecting step of when data is to be overwritten on an optical recording medium previously recorded with data a desired area thereof, detecting  
10 a recording condition used in the previous data recording; and an overwrite condition setting step of setting a condition for overwriting the data, to be overwritten, based on the detected recoding condition.

15 In accordance with another aspect, the present invention provides an optimal recording method for optical recording media comprising the steps of: reading out a reference recording condition recorded on an optical recording medium; recording test data while varying a recording condition with respect to the reference recording condition; deriving an  
20 optimum recording condition, based on reproduction characteristics of the test data; and generating information for managing the history of a recording environment variation occurring in association with the derived recording condition, and recording the generated information onto a desired area of  
25 the optical recording medium.

In accordance with another aspect, the present invention provides an optical recording medium comprising: a first recording area recorded with a reference recording condition adapted to recognize a reference for an optimum recording condition; and a second recording area recorded with information for managing the history of a recording environment variation occurring in association with an optimum recording condition determined with respect to the reference recording condition.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The above objects, and other features and advantages of the present invention will become more apparent after a reading of the following detailed description when taken in conjunction with the drawings, in which:

Fig. 1 is a block diagram illustrating the configuration of a general optical recording/reproducing apparatus;

Fig. 2 is a diagram illustrating the data format for a reference power value recorded on a re-writable optical recording medium;

Fig. 3 is a graph illustrating a variation in optical power with reference to a reference recording power value in the recording of test data;

Fig. 4 is a view illustrating a recording signal test area

A in a re-writable optical recording medium, along with a count area B for recording the number of test times;

Fig. 5 is a waveform diagram illustrating a reproduced signal for the test data recorded on the optical recording medium;

Fig. 6 is a graph depicting a modulation degree curve and a  $\gamma$  curve for detecting an optimum recording power value;

Fig. 7 is a diagram illustrating respective data formats for  $\gamma$  and  $\beta$  values recorded on the optical recording medium;

Fig. 8 is a graph illustrating a variation in jitter depending on the number of data overwrite times;

Fig. 9 is a table illustrating a variation in the reproduction characteristics of the optical recording medium depending on a variation in recording power value;

Fig. 10 is a flow chart illustrating an optimal recording method for optical recording media in accordance with a preferred embodiment of the present invention;

Fig. 11 is a diagram illustrating optimum recording condition information recorded on the count area of the optical recording medium in accordance with the present invention;

Fig. 12 is a flow chart illustrating an optimal recording method for optical recording media in accordance with another embodiment of the present invention;

Fig. 13 is a table illustrating various optimum power values for optical recording/reproducing apparatuses of

different types respectively;

Fig. 14 is a diagram illustrating respective formats of TOC information and optimum recording condition information recorded on the lead-in area of the optical recording medium; and

Fig. 15 is a diagram illustrating respective lead-in areas of sessions in an optical recording medium, each lead-in area being recorded with optimum recording condition information.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

Now, preferred embodiments of an optimal recording method for optical recording media in accordance with the present invention will be described.

The optical recording/reproducing apparatus illustrated in Fig. 1 may be used to implement the optimal recording method for optical recording media in accordance with the present invention. The optimal recording method of the present invention is characterized by additionally recording information about optimum recording conditions, detected by the execution of a procedure for detecting an optimum recording power value, on a count area B or a lead-in area of an optical recording medium 10, and subsequently determining, based on the optimum recording condition information, whether or not a procedure for detecting an optical recording power value is to

be conducted. Sequential procedures of the optimal recording method according to the present invention are executed under the control of the microcomputer 100 shown in Fig. 1.

Fig. 10 is a flow chart illustrating an example of the optimum recording method for optical recording media according to the present invention.

In accordance with the present invention, the count area B of an optical recording medium 10 is defined to be written with information about optimum recording conditions detected in the above mentioned procedure for detecting an optimum recording power value in association with an optical recording medium. This optimum recording condition information additionally recorded is used for data to be subsequently recorded.

In accordance with this optimum recording method, the microcomputer 100 determines at first step S10 whether or not an optical recording medium is loaded in the optical recording/reproducing apparatus. When it is determined that an optical recording medium is loaded in the optical recording/reproducing apparatus, it is determined at step S20 whether or not a request for data recording is made. Where it is determined at step S20 that there is a data recording request, the microcomputer 100 reads a count area B included in a PCA area (Fig. 4) of the optical recording medium 10 in order to determine whether or not there is recording condition



information on the count area B (Step S21).

Thereafter, the microcomputer 100 determines whether or not there is recording condition information on the count area B (Step S30). Where there is no recording condition information on the count area B, the microcomputer 100 conducts a procedure for detecting an optimum recording power value for the optical recording medium 10 because this state corresponds to a state in which there is no data recorded on the program area of the optical recording medium 10.

In order to execute the power detecting procedure, the control procedure of the microcomputer 100 proceeds to step S32. At step S32, the microcomputer 100 records test data onto the test area A of the optical recording medium 10, and then detects an optimum recording power value, based on the result of the recording of the test data. This power detecting procedure is conducted in the same fashion as the above mentioned conventional method.

When an optimum recording power value is detected for the optical recording medium 10 in accordance with the execution of step S32, the microcomputer 100 generates information about optimum recording conditions including the detected optimum recording power value. This optimum recording condition information is recorded onto the count area B of the optical recording medium 10 (Step S33).

Here, the optimum recording condition information is

information adapted to determine whether or not the procedure for detecting an optimum recording power value is to be conducted for recording of data. Referring to Fig. 11, such optimum recording condition information is illustrated. As shown in Fig. 11, the optimum recording condition information consists of 42-bit data including 3-bit optimum power data indicative of the detected power value, a 12-bit RID code indicative of a recorder ID stored in a memory internally equipped in the microcomputer 100, and 4-bit record speed data indicative of the current recording speed.

In the 42-bit optimum recording condition information, null data may be written on the remaining area of the 1ATIP (1 Absolute Time In Pre-groove) frame. In order to obtain an enhanced reliability, the optimum recording condition information may also be repeatedly recorded within the length of the 1 ATIP frame.

After completing the optimum power detecting and recording procedures as described above, the microcomputer 100 controls the optical driver unit 50 to record input digital data onto the program area of the optical recording medium 10 starting from an initial position of the program area, using an optical drive current corresponding to the recorded power value (Step S34).

Now, a description will be made in conjunction with the case in which it is determined at step S30 that there is data

recorded on the count area B, and the recording request at step S20, is not associated with overwriting of data, that is, the case in which data is written on the program area at a position following the initial position.

5           In this case, the microcomputer 100 identifies the information recorded on the count area B of the optical recording medium 10, that is, information for determining whether or not the optimum recording power value detecting procedure is to be conducted.

10           To this end, the microcomputer 100 compares the recorder ID code, included in the optimum recording condition information, with the ID code of the optical recording/reproducing apparatus stored in the internal memory of the microcomputer 100, at step S31.

15           Based on the result of the comparison, the microcomputer 100 determines whether or not the recorder ID code of the optical recording/reproducing apparatus corresponds to the recorder ID code detected from the optical recording medium (Step S40). Where the ID codes are identical to each other, the  
20           microcomputer 100 then compares the current record speed with a record speed detected from the optical recording medium (Step S41). Based on the result of the comparison, the microcomputer 100 determines whether or not the two record speeds are identical to each other (Step S50).

25           When it is determined at step S50 that the current record

speed corresponds to the record speed detected from the optical recording medium, this means that the optical recording medium 10 has been recorded with data, at least one time, at the same record speed as the current record speed, using the present optical recording/reproducing apparatus. In this state, accordingly, the microcomputer 100 identifies an optimum recording power value from the optimum recording condition information including the same record speed information as the current record speed information, without conducting the procedure for detecting an optimum power value at the data recording request (Step S51).

Since the identified power value is an optimum power value suitable for the optical system and circuit characteristics of the present optical recording/reproducing apparatus, the microcomputer 100 conducts recording of data on the optical recording medium 10, using the identified power value (Step S52).

However, where it is determined at step S40 that the two recorder ID codes are different from each other or where it is determined at step S50 that the two recode speeds are different from each other, the control procedure of the microcomputer 100 proceeds to step S32. At step 32, the microcomputer 100 executes the above mentioned optimum power value detecting procedure. Following step S32, the microcomputer 100 executes procedures for generating and recording information about

optimum recording conditions (Steps S33 and S34).

Here, the case, in which there is a difference between the optical recording medium 10 and the optical recording/reproducing apparatus in terms of the recorder ID code or the recode speed information, corresponds to the case in which there is no occasion that the optical recording medium has been recorded with data, using the optical recording/reproducing apparatus.

This case may also correspond to the case in which the optimum recording condition information written on the optical recording medium 10 has been updated or deleted, on the basis of a determination for the optimum recording condition information to be useful no longer.

Also, this case may correspond to the case in which although a data recording operation has been conducted for the optical recording medium 10 by the optical recording/reproducing apparatus, its record speed is different from the current record speed.

In this case, accordingly, the procedures for detecting an optimum power value, generating information about optimum recording conditions, and recording the optimum recording condition information are carried out (Steps S32, S33, and S34).

Fig. 12 illustrates another embodiment of the optimal recording method for optical recording media according to the

present invention.

The optimal recording method of Fig. 12 is associated with the case in which the recording request at step S20 of Fig. 11 corresponds to a data overwrite request.

In this case, the microcomputer 100 conducts, in response to the recording request, a control procedure to directly execute a data overwrite operation without determining whether or not the procedure for detecting an optimum recording power value based on the optimum recording condition information written on the count area B of the optical recording medium is to be carried out.

In accordance with this optimal recording method of Fig. 12, the microcomputer 100 first determines whether or not an optical recording medium is loaded in the optical recording/reproducing apparatus (Step S60). When it is determined that an optical recording medium is loaded in the optical recording/reproducing apparatus, it is determined whether or not a request for data recording made corresponds to a data overwrite request (Step S70). Where the data recording request corresponds to a data overwrite request, the microcomputer 100 identifies a highest power value from the recording condition information written on the count area B of the optical recording medium 10 (Step 71). Using the identified highest power value, the microcomputer 100 overwrites data on the optical recording medium 10 (Step S72).

This procedure is adapted to avoid a degradation in the characteristics of record signals occurring when overwriting of data is conducted at an optical power less than that used in the previous data recording.

5 After completing the data overwrite operation, the microcomputer 100 completely deletes the recording condition information written on the count area B of the optical recording medium 10 (Step S73). The reason why the recording condition information written on the count area B of the optical recording medium 10 is to be completely deleted will now be described.

10 For example, it is assumed that the optical recording medium 10 is recorded with various optimum power values for optical recording/reproducing apparatuses A, B, and C of different types respectively, as shown in Fig. 13.

15 Where the above mentioned procedure is carried out in this case, overwriting of data is conducted at a highest power value, that is, the power value of 9.5 mW associated with the optical recording/reproducing apparatus C. When data is recorded using the optical recording/reproducing apparatus B under the condition in which the optimum recording condition information of Fig. 13 is still maintained, a degradation in reproduction characteristics may occur because the power value of 8 mW less than the power value used in the previous data recording is used. In order to avoid this problem, the

20

25

recording condition information written on the count area of the recording medium is completely deleted.

At step S74, the microcomputer 100 then generates again recording condition information including the identified recording power value, the current record speed, and the recorder ID code stored in the internal memory of the microcomputer 100. The generated recording condition information is then written on the initial portion of the count area B.

Alternatively, the optimum recording condition information may be recorded on respective lead-in areas of sessions in the case of a multi-session type optical recording medium.

In this case, once an optimum recording power value is detected in accordance with the optimum recording power detecting procedure, that is, the OPC procedure, as mentioned above, desired data is recorded onto a track at the detected power value. After the recording of data, a session completion is made for that track. Thereafter, optimum recording condition information is written on the lead-in area of an associated session in the form of sub-queue data having a format of Fig. 14. At this time, the address of an address field for the optimum recording condition information is designated by a value other than values, previously designated, for example, values of "1" or "5". For example, the address value may be a



value of "2". This value of "2" is recorded as a value indicative of the optimum recording condition information. Accordingly, it can be found that when the address value of an address field detected corresponds to "2", data following the address data is optimum recording condition information having the same format as that of Fig. 11.

In accordance with such a recording procedure, optimum data recording condition information will be recorded for every session on the optical recording medium. Fig. 15 illustrates the recording format of an optical recording medium recorded with optimum recording condition information for every session. As shown in Fig. 15, optimum recording condition information is written on the lead-in area of each session.

Where an optical recording medium recorded with data for every session is loaded in the optical recording/reproducing apparatus A in order to record data thereon, and when a request for overwriting data on a particular session is made, the microcomputer of the optical recording/reproducing apparatus A detects an optimum recording power value from the optimum recording condition information written on the lead-in area of the particular session designated for the data overwriting.

For example, if the detected optimum recording power value is 10 mW different from that of the present optical recording/reproducing apparatus A, this optical recording/reproducing apparatus A does not record data at the

detected power value of 10 mV. In this case, the optical recording/reproducing apparatus A derives an optimum recording power value for the optical recording/reproducing apparatus A corresponding to the detected optimum recording power value of 10 mW. Where data is recorded on an optical recording medium using an optical recording/reproducing apparatus at an optimum recording power value detected by another optical recording/reproducing apparatus, the recording of data may be practically carried out at a power value more or less than the optimum recording power value used for the optical recording medium because respective optical driver units of those optical recording/reproducing apparatuses may have different offset values. In order to avoid such a situation, an optimum recording power value is derived based on the detected optimum recording power value, as mentioned above.

Also, where data is overwritten on the optical recording medium at a power value more than the power value used in the previous data recording, a degradation in reproduction characteristics may occur. Although a reduction in jitter occurs for a certain number of overwrite times, as indicated by an interval "C" in Fig. 8, a sharp increase in jitter exceeding an allowable range occurs following the interval "C". In order to avoid such a situation, it is avoided to overwrite data at a power value more than the power value used in the previous data recording.

In order to derive an optimum recording power value for the present optical recording/reproducing apparatus A corresponding to the detected optimum recording power value used for the previous data recording, the microcomputer of the optical recording/reproducing apparatus A conducts the above mentioned OPC procedure, thereby deriving a modulation degree curve as shown in Fig. 6. Thereafter, the microcomputer reproduces data from a session designated for the data overwriting, thereby deriving a degree of modulation for a particular signal component, for example, an 11T component. A recording power value corresponding to the degree of modulation associated with the session to be overwritten with data is derived from the modulation degree curve derived in the OPC procedure. The derived recording power value is the recording power value for the present optical recording/reproducing apparatus A corresponding to 10 mW, that is, the optimum recording power value for the optical recording/reproducing apparatus used in the previous data recording. The microcomputer of the optical recording/reproducing apparatus A overwrites input data onto the designated session at the derived power value.

Although the optical recording/reproducing apparatus A records data onto the optical recording medium at a recording power value identical to the previous power value, it may achieve the recording of data in a different fashion by

deriving an optimum recording power value in accordance with an OPC procedure, comparing the derived power value with the recording power value used for the previous data recording, and overwriting input data at the derived recording power value when the derived recording power value is not less than the previous recording power value.

It is desirable for this method to be conducted in the case in which there is a high possibility of a degradation in the reproduction characteristics of overwritten data occurring, when the overwriting of data is conducted using a recording power value used in a previous data recording, due to a considerable difference of the recording power value from a desired optimum recording power value.

As apparent from the above description, the present invention provides an optimal recording method for optical recording media which is capable of additionally recording information about optimum recording conditions on the count area or lead-in area of an optical recording medium in order to allow a subsequent recording of data on the optical recording medium, using an optimum recording power value included in the recorded optimum recording condition information.

Therefore, in accordance with the present invention, it is possible to prevent a degradation in the reproduction characteristics of overwritten data from occurring when the power value used in the overwriting of the data is less than

the power value used in the previous data recording.

Although the preferred embodiments of the invention have been disclosed for illustrative purposes, those skilled in the art will appreciate that various modifications, additions and substitutions are possible, without departing from the scope and spirit of the invention as disclosed in the accompanying claims.

WHAT IS CLAIMED IS:

1. An optimal recording method for optical recording media comprising:

5 a recording condition detecting step of when data is to be overwritten on an optical recording medium previously recorded with data a desired area thereof, detecting a recording condition used in the previous data recording; and

10 an overwrite condition setting step of setting a condition for overwriting the data, to be overwritten, based on the detected recoding condition.

15 2. The optimal recording method according to claim 1, wherein the recording condition detection is carried out by reading out a recording condition previously stored in the optical recording medium.

20 3. The optimal recording method according to claim 1, where the recording condition detection is carried out by detecting reproduction signal characteristics of the previously recorded data.

4. An optimal recording method for optical recording media comprising the steps of:

25 reading out a reference recording condition recorded on

an optical recording medium;

recording test data while varying a recording condition with respect to the reference recording condition;

deriving an optimum recording condition, based on reproduction characteristics of the test data; and

generating information for managing the history of a recording environment variation occurring in association with the derived recording condition, and recording the generated information onto a desired area of the optical recording medium.

5. The optimal recording method according to claim 4, wherein the recording environment variation is a variation of an apparatus used to record data onto the optical recording medium.

6. The optimal recording method according to claim 4, wherein the recording environment variation is a variation in a record speed used to record data onto the optical recording medium.

7. The optimal recording method according to claim 4, wherein the history management information is an optimum recording condition meeting the recording condition variation.

8. The optimal recording method according to claim 4,  
wherein the history management information is an optimum  
recording condition meeting the recording condition variation,  
the history managing information being recorded in addition to  
management information generated for every record unit.

9. The optimal recording method according to claim 4,  
wherein the history management information is recorded onto a  
count area of the optical recording medium or respective lead-  
in areas of sessions of the optical recording medium.

10. The optimal recording method according to claim 4,  
wherein data is recorded on a desired region of the optical  
recording medium, along with information indicative of an  
optimum recording condition for the data.

11. The optimal recording method according to claim 4,  
wherein the optimum recording condition includes at least  
information for identifying an apparatus used to record data  
onto the optical recording medium, an optimum recording power  
value, and information about record speed.

12. The optimal recording method according to claim 11,  
wherein the optimum recording condition including the  
information for identifying the apparatus used to record data



onto the optical recording medium, the optimum recording power value, and the information about record speed is repeatedly recorded by an allowable number of times.

5           13. An optimal recording method for optical recording media comprising:

an optimum recording condition reading step of when data is to be overwritten on an optical recording medium previously recorded with data a desired area thereof, reading an optimum recording condition previously recorded on the optical recording medium;

an overwrite condition setting step for setting a condition for overwriting the data, to be overwritten, based on the read optimum recording condition; and

15           an overwriting step for overwriting data onto the optical recording medium under the set overwrite condition.

20           14. The optimal recording method according to claim 13, wherein the optimum recording condition includes at least information for identifying an apparatus used to record data onto the optical recording medium, an optimum recording power value, and information about record speed, and when the apparatus identification information and the record speed information detected for the previously recorded data from the  
25           optical recording medium are identical to those of the

apparatus used to overwrite data, respectively, the overwriting step is conducted at the optimum recording power value detected from the optical recording medium.

5           15. The optimal recording method according to claim 14, wherein when there is an occasion corresponding to a case in which no optimum recording condition is read out from the optical recording medium, a case in which the read apparatus identification information is not identical to that of the apparatus used to overwrite data, or a case in which the read record speed information is not identical to that of the apparatus, the steps of the method comprise the steps of:

10           reading the optimum recording condition previously recorded on the optical recording medium;

15           recording test data while varying a recording condition with respect to the read recording condition;

          deriving an optimum recording condition, based on reproduction characteristics of the test data;

20           setting the derived optimum recording condition as an overwrite condition, conducting an overwriting of data under the set overwrite condition, and recording the derived optimum recording condition onto the optical recording medium.

          16. The optimal recording method according to claim 13, wherein the optimum recording condition read out from the

optical recording medium includes an optimum recording power value, the overwrite condition setting and data overwriting steps comprise the steps of:

5        setting a power value less than the optimum recording power value included in the read optimum recording condition; and

overwriting data at the set power value.

10        17. The optimal recording method according to claim 13, wherein the optimum recording condition read out from the optical recording medium includes an optimum recording power value, the overwrite condition setting and data overwriting steps comprise the steps of:

15        deriving a power value for an apparatus, used to record data onto the optical recording medium, corresponding to the optimum recording power value included in the read optimum recording condition; and

overwriting data onto the optimum recording medium at the derived power value.

20        18. The optimal recording method according to claim 17, wherein the power value deriving and data overwriting steps comprise the steps of:

25        deriving an optimum recording power value for the optical recording medium;

comparing the derived optimum recording power value with the read optimum recording power value, and

overwriting data at the derived optimum recording power value when the read optimum recording power value is not less than the derived optimum recording power value.

19. An optical recording medium comprising:

a first recording area recorded with a reference recording condition adapted to recognize a reference for an optimum recording condition; and

a second recording area recorded with information for managing the history of a recording environment variation occurring in association with an optimum recording condition determined with respect to the reference recording condition.

20. The optical recording medium according to claim 19, wherein the second recording area is an area for recording management information generated for every record unit upon recording data.

21. An optimal recording method comprising the steps of:

(a) detecting a recorder identification code, an optimum recording power value, and information about record speed, as recording condition information recorded on a designated area of an optical recording medium;

(b) setting a power value not less than the detected optimum, recording power value when the detected recorder identification code and the detected record speed information are identical to a recorder identification code for an apparatus, used to record data, and a current record speed of the apparatus, respectively, and recording data at the set power value;

(c) recording test data onto the optical recording medium, and deriving an optimum power value, based on reproduction characteristics of the recorded test data, when there is no optimum recording condition detected, when the detected recorder identification information is not identical to that of the apparatus used to record data, or when the detected record speed information is not identical to the current record speed of the apparatus; and

(d) recording the derived optimum power value, the recorder identification code of the apparatus, and the current record speed information onto a designated area of the optical recording medium, as optimum recording condition information, and then recording data onto the optical recording medium at the derived optimum optical power value.

## ABSTRACT OF THE DISCLOSURE

Disclosed is an optimal recording method for optical recording media which is capable of recording information about optimum recording conditions on an optical recording medium in order to allow a subsequent recording of data at an optimum recording power, based on the recorded optimum recording condition information. In this method, test data is recorded to allow derivation of an optimum power value based on reproduction characteristics of the test data. An intrinsic recorder ID information of an optical recording/reproducing apparatus, used to record data on the optical recording medium, and information about the record speed of the apparatus are recorded, along with the derived optimum power value, onto the count area of the optical recording medium or respective lead-in areas of sessions. The apparatus reads out the recorded optimum recording condition information when data is subsequently recorded onto the optical recording medium. When it is determined based on the read optimum recording condition information that both the read ID code and record speed are identical to those of the apparatus, data is recorded at the optimum recording power value derived based on the optimum recording condition information. The optimum recording condition information is updated while reflecting a variation of the recording environment.

Fig. 1


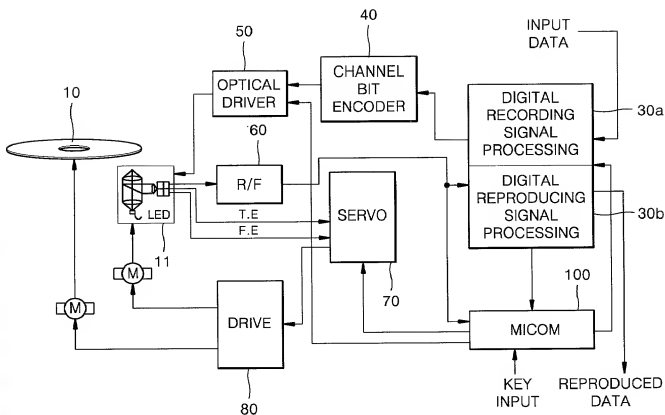


Fig. 2



'Minute' Byte when M1 : S1 : F1 = 101

W1, W2, W3	= 000	→	$P_{ind} = 5mw$
	= 001	→	$P_{ind} = 6mw$
	= 010	→	$P_{ind} = 7mw$
	= 011	→	$P_{ind} = 8mw$
	= 100	→	$P_{ind} = 9mw$
	= 101	→	$P_{ind} = 10mw$
	= 110	→	$P_{ind} = 11mw$
	= 111	→	$P_{ind} = 12mw$

{ W1, W2, W3 : Indicative Target Writing Power( $P_{ind}$ )  
 X1 : Reserved Future Extensions(=0)  
 V1, V2, V3 : Reference Speed

Fig. 3




Fig. 4

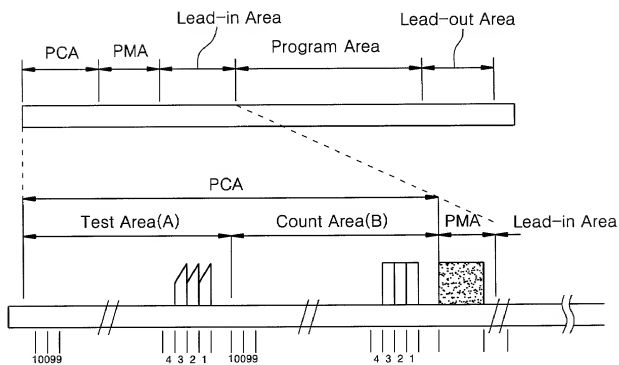




Fig. 5




Fig. 6


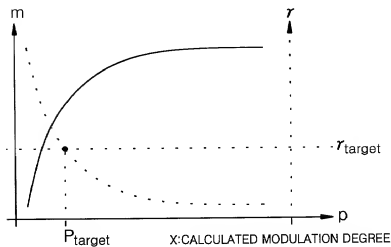


Fig. 7



'Second' Byte when  $M1 : S1 : F1 = 001$

- { P1,P2,P3 : Power multiplication factor  $p$  at reference speed
- { G1,G2,G3 : Target  $r$  value of the modulation/power function for all speeds
- { Y1 : Reserved for future exetentions(=0000)

Fig. 8

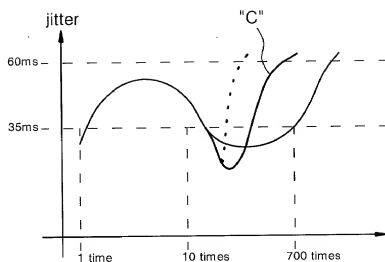


Fig. 9

	PRECEDING RECORDING	FOLLOWING RECORDING	REPRODUCTION CHARACTERISTICS
RECORDING POWER	HIGH	LOW	BAD
	HIGH	HIGH	NORMAL
	LOW	HIGH	GOOD
	LOW	LOW	NORMAL

Fig. 10

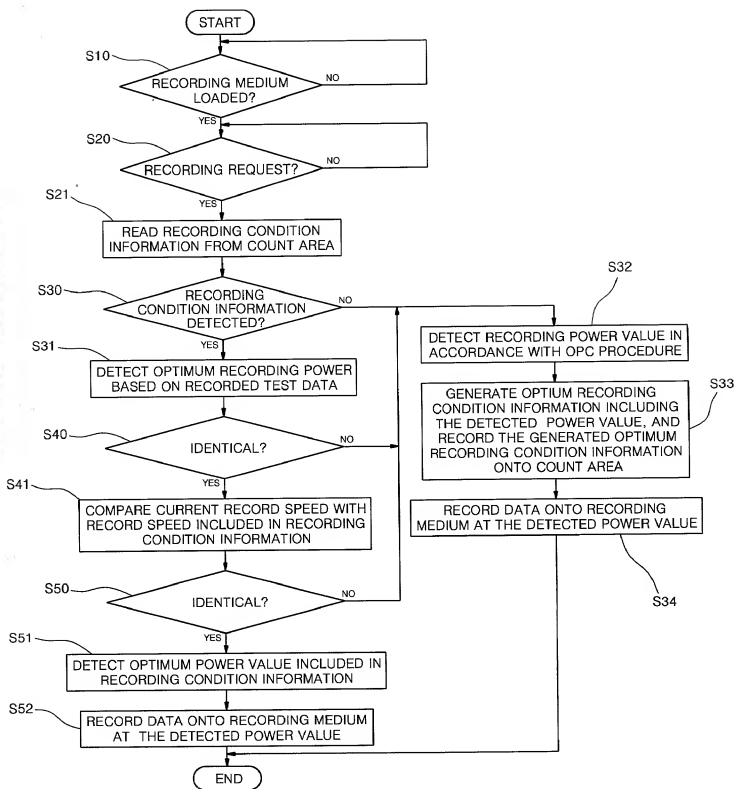


Fig. 11

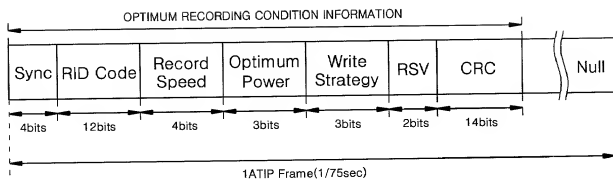


Fig. 12

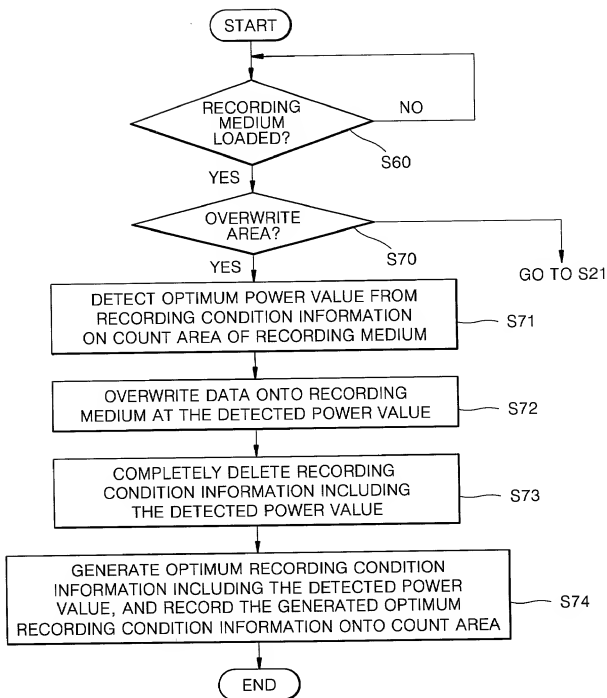


Fig. 13

APPARATUS A	APPARATUS B	APPARATUS C
8.5mw	8mw	9.5mw

Fig. 14


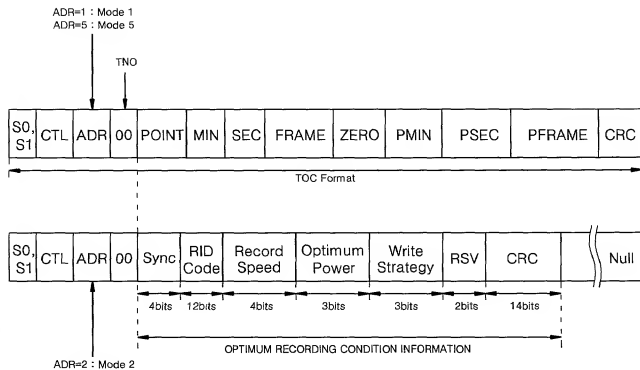


Fig. 15

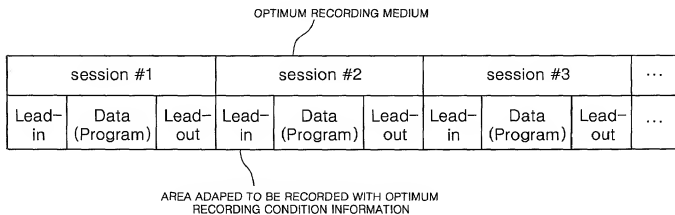

## BIRCH, STEWART, KOLASCH &amp; BIRCH, LLP

P.O. Box 747 • Falls Church, Virginia 22040-0747  
 Telephone: (703) 205-8000 Facsimile: (703) 205-8050

PLEASE NOTE:  
 YOU MUST  
 COMPLETE THE  
 FOLLOWING

# COMBINED DECLARATION AND POWER OF ATTORNEY FOR PATENT AND DESIGN APPLICATIONS

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated next to my name; that I verily believe that I am the original, first and sole inventor (if only one inventor is named below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: **OPTICAL RECORDING METHOD FOR OPTICAL RECORDING MEDIA AND OPTICAL RECORDING MEDIUM STORED WITH INFORMATION ABOUT OPTIMUM RECORDING CONDITIONS**

Insert Title:

Fill in Appropriate  
 Information -  
 For Use Without  
 Specification  
 Attached:

the specification of which is attached hereto. If not attached hereto,

the specification was filed on \_\_\_\_\_ as  
 United States Application Number \_\_\_\_\_ (if applicable) and/or  
 and amended on \_\_\_\_\_ as PCT  
 the specification was filed on \_\_\_\_\_; and was  
 International Application Number \_\_\_\_\_ (if applicable)  
 amended under PCT Article 19 on \_\_\_\_\_

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendments referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, .56.

I do not know and do not believe the same was ever known or used in the United States of America before my or our invention thereof, or patented or described in any printed publication in any country before my or our invention thereof or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representative or assigns more than twelve months (six months for designs) prior to this application, and that no application for patent or inventor's certificate on this invention has been filed in any country foreign to the United States of America prior to this application by me or my legal representatives or assigns, except as follows.

I hereby claim foreign priority benefits under Title 35, United States Code, 19(a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

## Prior Foreign Application(s)

## Priority Claimed

40306/1999	Republic of Korea	September 18, 1999	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No
(Number)	(Country)	(Month/Day/Year Filed)		
_____	_____	_____	<input type="checkbox"/> Yes	<input type="checkbox"/> No
(Number)	(Country)	(Month/Day/Year Filed)		
_____	_____	_____	<input type="checkbox"/> Yes	<input type="checkbox"/> No
(Number)	(Country)	(Month/Day/Year Filed)		
_____	_____	_____	<input type="checkbox"/> Yes	<input type="checkbox"/> No
(Number)	(Country)	(Month/Day/Year Filed)		

I hereby claim the benefit under Title 35, United States Code, 19(e) of any United States provisional applications(s) listed below.

Insert Provisional  
 Application(s):  
 (if any)

(Application Number)	(Filing Date)
_____	_____
(Application Number)	(Filing Date)
_____	_____

All Foreign Applications, if any, for any Patent or Inventor's Certificate Filed More than 12 Months (6 Months for Designs) Prior to the Filing Date of This Application:

Country	Application Number	Date of Filing (Month/Day/Year)
_____	_____	_____
_____	_____	_____

Insert Requested  
 Information:  
 (if appropriate)

I hereby claim the benefit under Title 35, United States Code, 20 of any United States and/or PCT application(s) listed below and insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States and/or PCT application in the manner provided by the first paragraph of Title 35, United States Code, 12.1 I acknowledge the duty to disclose information which is material to the patentability as defined in Title 37, Code of Federal Regulations, .56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

Insert Prior U.S.  
 Application(s):  
 (if any)

(Application Number)	(Filing Date)	(Status - patented, pending, abandoned)
_____	_____	_____
(Application Number)	(Filing Date)	(Status - patented, pending, abandoned)
_____	_____	_____

## Attorney Docket No.

I hereby appoint the following attorneys to prosecute this application and/or an international application based on this application and to transact all business in the Patent and Trademark Office connected therewith and in connection with the resulting patent based on instructions received from the entity who first sent the application papers to the attorneys identified below, unless the inventor(s) or assignee provides said attorneys with a written notice to the contrary:

Raymond C. Stewart	(Reg. No. 21,066)	Terrell C. Birch	(Reg. No. 19,382)
Joseph A. Kolasch	(Reg. No. 22,463)	James M. Slattery	(Reg. No. 28,380)
Bernard L. Sweeney	(Reg. No. 24,448)	Michael K. Mutter	(Reg. No. 29,680)
Charles Gorenstein	(Reg. No. 29,271)	Gerald M. Murphy, Jr.	(Reg. No. 28,977)
Leonard R. Svensson	(Reg. No. 30,330)	Terry L. Clark	(Reg. No. 32,644)
Andrew D. Meikle	(Reg. No. 32,868)	Marc S. Weiner	(Reg. No. 32,181)
Joe McKinney Muncy	(Reg. No. 32,334)	Donald J. Daley	(Reg. No. 34,313)
John W. Bailey	(Reg. No. 32,881)	John A. Castellano	(Reg. No. 35,094)
Gary D. Yacura	(Reg. No. 35,416)		

Send Correspondence to:

**BIRCH, STEWART, KOLASCH & BIRCH, LLP** or **Customer No. 2292**  
P.O. Box 747 • Falls Church, Virginia 22040-0747  
Telephone: (703) 205-8000 • Facsimile: (703) 205-8050

PLEASE NOTE:  
YOU MUST  
COMPLETE  
THE  
FOLLOWING:

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

GIVEN NAME/FAMILY NAME <i>Jim-Tae Roh</i>		INVENTOR'S SIGNATURE <i>[Signature]</i>	DATE* <i>09/07/00</i>
Residence (City, State & Country) <i>Kyonggi-do, Korea</i>		CITIZENSHIP <i>Republic of Korea</i>	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country) <i>Kummaul Hyundai APT 606-303, Pyeongchon-dong, Dongan-gu, Anyang-si, Kyonggi-do, Korea</i>			
GIVEN NAME/FAMILY NAME		INVENTOR'S SIGNATURE	DATE*
Residence (City, State & Country)		CITIZENSHIP	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			
GIVEN NAME/FAMILY NAME		INVENTOR'S SIGNATURE	DATE*
Residence (City, State & Country)		CITIZENSHIP	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			
GIVEN NAME/FAMILY NAME		INVENTOR'S SIGNATURE	DATE*
Residence (City, State & Country)		CITIZENSHIP	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			
GIVEN NAME/FAMILY NAME		INVENTOR'S SIGNATURE	DATE*
Residence (City, State & Country)		CITIZENSHIP	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			

Full Name of First or Sole Inventor:  
Insert Name of Inventor  
Insert Date This Declaration is Signed

Insert Residence Inventor's Citizenship

Insert Post Office Address

Full Name of Second Inventor, if any: see above

Full Name of Third Inventor, if any: see above

Full Name of Fourth Inventor, if any: see above

Full Name of Fifth Inventor, if any: see above

Full Name of Sixth Inventor, if any: see above

Full Name of Seventh Inventor, if any: see above

Full Name of Eighth Inventor, if any: see above

Full Name of Ninth Inventor, if any: see above

Full Name of Tenth Inventor, if any: see above

Full Name of Eleventh Inventor, if any: see above

Full Name of Twelfth Inventor, if any: see above

Full Name of Thirteenth Inventor, if any: see above

Full Name of Fourteenth Inventor, if any: see above

Full Name of Fifteenth Inventor, if any: see above

Full Name of Sixteenth Inventor, if any: see above

Full Name of Seventeenth Inventor, if any: see above

Full Name of Eighteenth Inventor, if any: see above

\*DATE OF SIGNATURE